


Lifting & Spreader Beams

Model 14 - Modular Spreader Beam

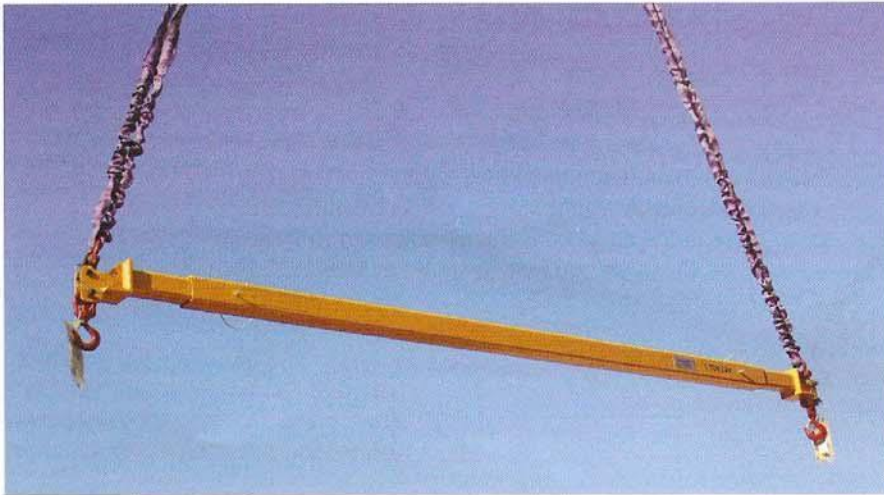

PRODUCT FEATURES:

- Designed to accommodate spreads from 10' to 22'.
- Capacities in 1 and 2 ton.
- Lightweight.
- Faspin with lanyard allows for quick adjustment of spread in 1' increments.
- Hair pin cotter top rigging attachment.
- Designed and manufactured to ASME standards.




Outer Tube



Inner Tube - each system contains two (2)



Short Tube



Lifting Eye Dimensions

LIFTING & SPREADER BEAMS

SPECIFICATIONS

Model Number	Capacity (tons)	Spread (ft.) Min./Max.	Dimensions (inches)						Weight (lbs.)
			Headroom		Lifting Eye			O-Hook Opening With Latch	
			at Min. Spread	at Max. Spread	A	B	C		
14-1-10/22	1	10 / 22	135.6	150.7	0.5	2.5	5	0.97	195
14-2-10/22	2	10 / 22	135.6	150.7	0.75	3	6	0.97	275

Recommended Optional Round Sling Top Rigging* (add "R" to model number ie: 14R-1-10/22)

Top Rigging - 1 ton

Top Rigging - 2 ton

Each system contains two(2)sets for the two(2) different spread ranges.



* Recommended Optional Top Rigging is two (2) double leg bridle round slings, each of different lengths, to be used in various beam configurations. Minimum rigging angle 45°, see Instruction Manual for details.

Other Top Rigging Options (Not INSTOCK, consult factory for delivery information)

OPTION C

Chain top rigging from beam to crane hook.
(Add "C" to model number)

OPTION W

Wire rope top rigging from beam to crane hook.
(Add "W" to model number)