

Levels & Measuring Tools

Quick, easy, and accurate measurements can mean the difference between a job well done and one that misses the mark. Klein offers a variety of levels and other measuring devices that will help you measure up to the task.

FOR PROFESSIONALS... SINCE 1857®




Levels & Measuring Tools



Levels

Features:

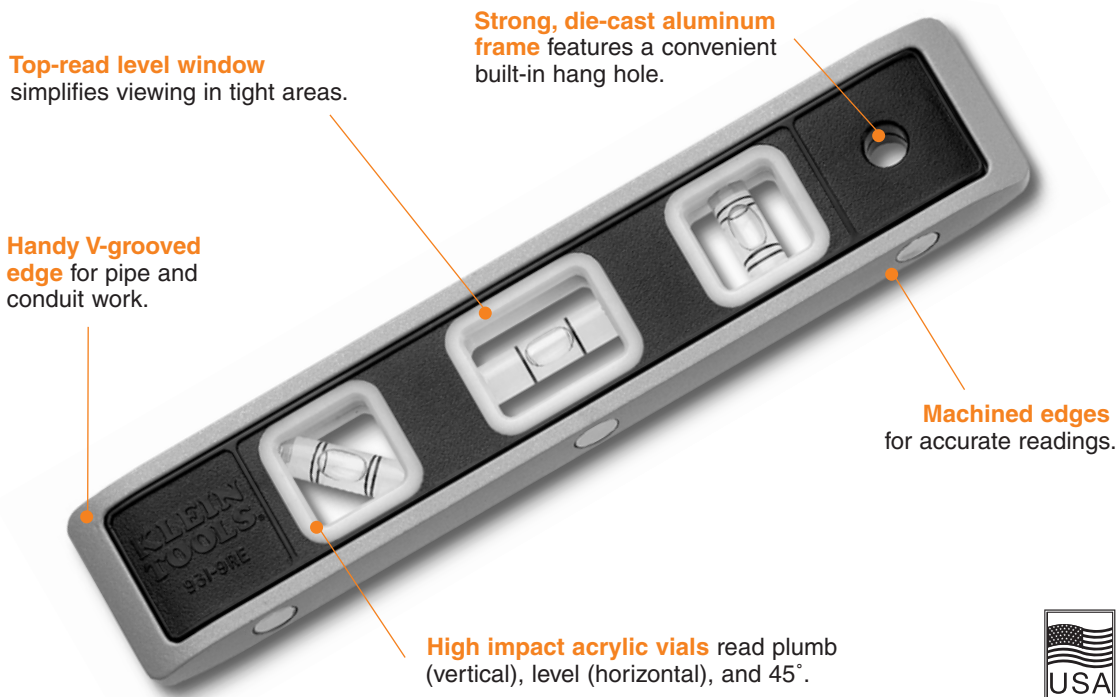

Magnetic Torpedo Level

Additional Features:

- Magnetized strip on bottom.
- Yellow vials for easy viewing.



930-9

Cat. No.	Overall Length	Weight (lbs.)
930-9	9" (229 mm)	.36

Rare Earth Magnet Torpedo Level

Additional Features:

- Powerful Rare Earth magnets hold firmly to iron and steel surfaces.
- Rare Earth magnets are up to 5 times stronger than strip magnets.
- Yellow vials framed with E-Z SEE™ glow-in-the-dark material for easier viewing in dimly lit areas.



931-9RE


Cat. No.	Overall Length	Weight (lbs.)
931-9RE	9" (229 mm)	.36

All dimensions are in inches and (millimeters) unless otherwise specified.

▲WARNING: Always wear approved eye protection.

Wood Folding Rules

- Strong, 6' (183 cm) long hardwood rules with clear abrasion-resistant coating.
- Black markings on yellow, with red stud center markings every 16 inches.
- Measurements are marked on both sides and both edges, graduated to 1/16th inch.
- Riveted lock joints are designed for long wear and maintained accuracy.
- Engraved graduations on both sides.
- Slide moves under friction in a T-slot which has stops at each end to prevent it from falling out. (Cat. No. 905-6)

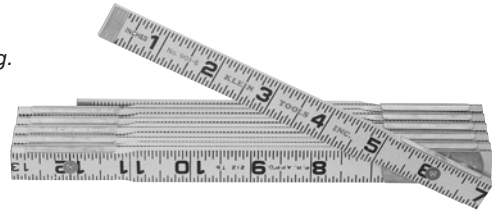


901-6

Cat. No.	Reading	Length	Weight (lbs.)
900-6	inside	6' (183 cm)	.33
901-6	outside	6' (183 cm)	.33
6-Ft. Folding Rule — with Extension			
905-6	outside	6' (183 cm)	.33

Fiberglass Folding Rules

- Constructed of tough nylon, reinforced with glass fibers for added durability, and resistance to weather, abrasion, and most chemicals.
- Positive locking joints and stainless steel spring hinges for added strength.
- Measurements are marked on both sides and both edges, graduated to 1/16th inch.
- Black markings on yellow, with red stud center markings every 16 inches.
- Engraved graduations on both sides.

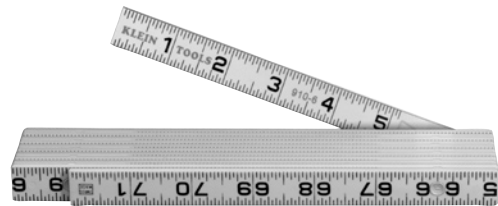

910-6

Cat. No.	Reading	Length	Weight (lbs.)
910-6	inside	6' (183 cm)	.33
911-6	outside	6' (183 cm)	.33

Power-Return Rules

Features:

- Durable steel belt clip** for convenience.
- True zero feature** for accurate inside and outside measuring.
- Nylon-coated, hardened steel blade** resists abrasion and wear for long life.
- Multi-riveted end hook with bottom blade protector** reinforces the blade tip and provides maximum pull-out strength.
- Built-in shock absorber** to protect blade tip.

All dimensions are in inches and (millimeters) unless otherwise specified.

▲WARNING: Always wear approved eye protection.

▲WARNING: Protect hands when cleaning magnetic tip. Use gloves or cloth.

▲WARNING: Avoid magnetic contact with sensitive electronic or computer equipment.

▲WARNING: To avoid personal injury and damage to this tool, do not allow the tape blade to retract into case at full speed.

▲WARNING: NOT insulated. Do NOT use on live circuits.

▲WARNING: Do NOT open case. Spring motor is under tension, and opening case may cause injury.



Power-Return Rules

Power-Return Rule – Magnetic Dual-End Hook, Double-Sided Blade

Additional Features:

- Large magnetic dual-end hook* allows for easier one-person measurements on ferrous metals.**
- Large dual-end hook with double-sided blade for easy measurements, markings, and drawings.
- Comfortable rubber grip built into case for positive gripping and impact resistance.
- Positive blade lock holds blade securely in place.
- Oversized easy-to-read blade numbers.
- Tape measure holders available.



918-25RE

	Cat. No.	Blade Length	Width	Weight (lbs.)
NEW!	918-16RE	16' (5 m)	1" (25 mm)	.60
NEW!	918-25RE	25' (7.5 m)	1" (25 mm)	.90
NEW!	918-7.5ME-RE	7.5 m (25')	25 mm (1")	.90
NEW!	918-30RE	30' (9 m)	1" (25 mm)	1.10

*Note: Patent pending design.

**Note: Magnetic strength will vary with different types of metal surfaces.

Power-Return Steel Rules – Magnetic Tip

Additional Features:

- Rare Earth magnetic tip sticks to iron and steel surfaces for simple one-person measurements.
- Comfortable, non-slip rubber jacket for easy gripping of case.
- Thick rubber jacket protects case against fall impacts.
- Convenient two-step lock button – 1st step slows retraction of the blade; 2nd step holds the blade securely.
- High-visibility orange case for easy locating in work areas and tool bags.
- Oversized, bold black numbers (first 11 inches) for easy reading*, 16" (406 mm) and 19" (485 mm) red stud markings.
- Tape measure holders available.



916-25RE

	Cat. No.	Blade Length	Width	Weight (lbs.)
	916-16RE	16' (5 m)	1" (25 mm)	.63
	916-25RE	25' (7.5 m)	1" (25 mm)	.90
	916-7.5ME-RE	7.5 m (25')	25 mm (1")	.90
	916-30RE	30' (9 m)	1" (25 mm)	1.10

(Note: Magnetic strength will vary with different types of metal surfaces.)

*Not available on Cat. No. 916-7.5ME-RE.

All dimensions are in inches and (millimeters) unless otherwise specified.

▲WARNING: Always wear approved eye protection.

▲WARNING: Protect hands when cleaning magnetic tip. Use gloves or cloth.

▲WARNING: Avoid magnetic contact with sensitive electronic or computer equipment.

▲WARNING: To avoid personal injury and damage to this tool, do not allow the tape blade to retract into case at full speed.

▲WARNING: NOT insulated. Do NOT use on live circuits.

▲WARNING: Do NOT open case. Spring motor is under tension, and opening case may cause injury.



Power-Return Steel Rules – Double-Sided

Additional Features:

- Double-sided rule for easy reading of elevation, flat surface, and pipe conduit measurements. (Not available on Cat. No. 908-12.)
- Comfortable, non-slip rubber grip for easy gripping of case.
- Thick rubber grip protects case against fall impacts.
- Eye-catching blue case for quick identification in work areas and tool bags.
- Oversized, bold black numbers (first 11 inches) for easy reading*, 16" (406 mm) and 19" (485 mm) red stud markings.
- Tape measure holders available.




908-25

Cat. No.	Blade Length	Width	Weight (lbs.)
908-12	12' (3.5 m)	5/8" (16 mm)	.33
908-16	16' (5 m)	1" (25 mm)	.60
908-25	25' (7.5 m)	1" (25 mm)	.90
908-7.5ME	7.5 m (25')	25 mm (1")	.90
908-30	30' (9 m)	1" (25 mm)	1.10

*Not available on Cat. No. 908-12.

Power-Return Steel Rules – Polished Chrome Case

- Oversized numbers for quick, easy, and accurate readings.
- Baked-on epoxy coating to resist scratches, rust, and abrasions.
- 3-rivet end hook reinforces the blade tip.
- Positive no-drift lock firmly holds the blade in place at any length.
- True zero feature for accurate inside and outside measuring.
- 16" (406 mm) and 19.2" (485 mm) stud markings.
- Tape measure holders available.

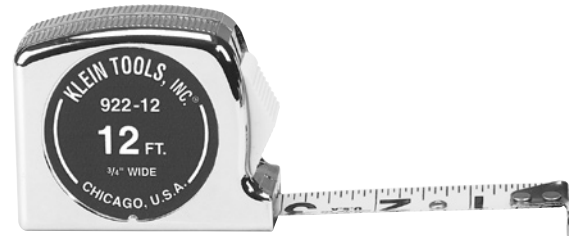

922-12

Cat. No.	Blade Length	Width	Weight (lbs.)
922-12	12' (3.5 m)	3/4" (19 mm)	.35
922-16	16' (5 m)	3/4" (19 mm)	.45
922-25	25' (7.5 m)	1" (25 mm)	1.00
922-30	30' (8 m)	1" (25 mm)	1.40

Power-Return Steel Rules – Metric-English

- Same as No. 922 Series, but with both English and metric scales.
- Tape measure holders available.

Cat. No.	Blade Length	Width	Weight (lbs.)
926-3ME	3 m (10')	13 mm (1/2")	.30
926-5ME	5 m (16')	19 mm (3/4")	.48
926-8ME	8 m (26')	25 mm (1")	1.20



926-3ME

All dimensions are in inches and (millimeters) unless otherwise specified.

▲WARNING: Always wear approved eye protection.

▲WARNING: Do NOT open case. Spring motor is under tension, and opening case may cause injury.

▲WARNING: Never use on or near live electrical circuits.

▲CAUTION: To prevent high speed rewinding, apply slight pressure with forefinger on the underside of the blade.




Power-Return Rules

Power-Return Steel Rules – High-Visibility Case

- Same as No. 922 series, but with high-visibility case.
- High-visibility, high-impact orange case makes it easy to find in a tool box, pouch, and on the jobsite.
- 16" (406 mm) and 19.2" (485 mm) stud-center marks.
- Tape measure holders available.

Cat. No.	Blade Length	Width	Weight (lbs.)
928-16HV	16' (5 m)	3/4" (19 mm)	.45
928-25HV	25' (7.5 m)	1" (25 mm)	1.00

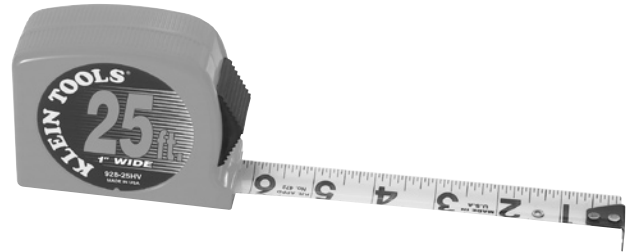


928-25HV

Fiberglass Tapes

Woven Fiberglass Tapes – Case

- Woven fiberglass tape with moisture-proof coating of polyvinyl chloride assures durability and protects against oil or chemicals.
- Can be immersed in water without adverse effects.
- All metal parts are nickel-plated for protection against rust.
- End-hooks are permanently attached to reinforced strip.
- Black case and reel are ruggedly built, yet lightweight and comfortable to use.
- Tape line graduated in feet and inches to 8ths.
- Black graduating numbers and red foot markings on yellow background.
- Protective carrying case encloses tape completely.
- Tape ring tucks neatly into case opening for storage.

Cat. No.	Length	Width	Weight (lbs.)
946-50	50' (15 m)	1/2" (13 mm)	.80
946-100	100' (30 m)	1/2" (13 mm)	1.20

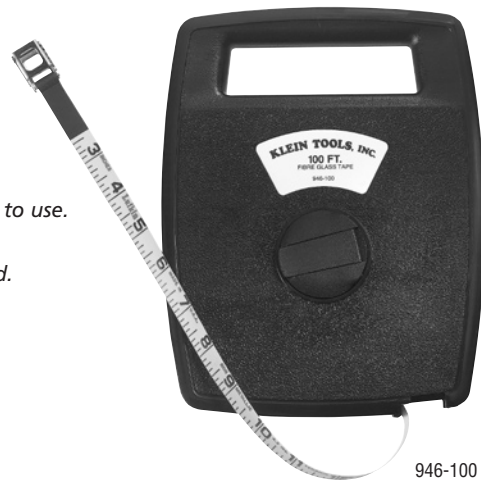

946-100

Woven Fiberglass Tape – Open-Reel

- Woven fiberglass tape with moisture-proof coating of polyvinyl chloride assures durability and protects against oil or chemicals.
- Can be immersed in water without adverse effects.
- Black figures on a white background are easy to read.
- All metal parts are nickel-plated for protection against rust.
- End hooks are permanently attached to a reinforced strip.
- Case and reel are ruggedly built, yet lightweight and comfortable to use.
- Tape line is graduated in feet and inches to 8ths.
- Graduations and numbers are black; foot markings are red.
- Contained in a high-visibility orange open reel and is easy to handle and rewind.
- Line will not collect dirt or bring debris into the case.

Cat. No.	Length	Width	Weight (lbs.)
946-150	150' (46 m)	1/2" (13 mm)	1.70



946-150

All dimensions are in inches and (millimeters) unless otherwise specified.

▲WARNING: Always wear approved eye protection.

▲WARNING: Do NOT open case. Spring motor is under tension, and opening case may cause injury.

▲WARNING: Never use on or near live electrical circuits.

▲CAUTION: To prevent high speed rewinding, apply slight pressure with forefinger on the underside of the blade.