


# Strippers, Cutters & Crimpers

Manufactured with the needs of the professional tool user in mind, Klein strippers, cutters, and crimpers are designed to get jobs done with precision and quality.

FOR PROFESSIONALS... SINCE 1857®

Strippers, Cutters & Crimpers



# Wire Strippers/Cutters

## Features:

**Curved handles** help reach into confined areas.

**Double-dipped comfort grips.**

**Wire looping and bending holes.**

**Strong-gripping serrated nose;** for easy bending, shaping, and pulling of wire.

**Coil spring** provides fast self-opening action.

# KLEIN-KURVE®

**Handy closure lock** for convenient storage.

**Screw-shearing holes.**

**Precision-ground stripping holes.**



## Wire Strippers/Cutters – Solid and Stranded Wires

# KLEIN-KURVE®

### Additional Features:

- Precision shear-type blades for clean cuts on solid and stranded copper wire.
- Easy-to-read markings on both sides.



11055

| Cat. No. | Handle Color | Overall Length  | Strips Solid AWG Gauges                              | Strips Stranded AWG Gauges                           | Screw Shearing | Weight (lbs.) |
|----------|--------------|-----------------|--|--|----------------|---------------|
| 11055    | blue/yellow  | 7-1/8" (181 mm) | 10 – 18 (4.0 mm <sup>2</sup> – .75 mm <sup>2</sup> ) | 12 – 20 (2.5 mm <sup>2</sup> – .50 mm <sup>2</sup> ) | 6-32 & 8-32    | .34           |
| 11057    | blue/red     | 7-1/8" (181 mm) | 20 – 30 (.50 mm <sup>2</sup> – .14 mm <sup>2</sup> ) | 22 – 32 (.34 mm <sup>2</sup> – .05 mm <sup>2</sup> ) | 6-32 & 8-32    | .32           |

## Dual NM Cable Strippers/Cutters

# KLEIN-KURVE®

### Additional Features:

- 10/2, 12/2, and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 10, 12, and 14 AWG lead wire.
- Precision staggered blades for square, clean cuts on solid copper wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.




K1412

| Cat. No. | Handle Color  | Overall Length   | Strips and Cuts  | Type NM-B Cable | Screw Shearing | Weight (lbs.) |
|----------|---------------|------------------|--|-----------------|----------------|---------------|
| K1210    | yellow/orange | 7-4/5" (198 mm)  | 10 & 12 AWG solid (4.0 mm <sup>2</sup> & 2.5 mm <sup>2</sup> ) | 10/2 & 12/2     | 6-32 & 8-32    | .43           |
| K1412    | yellow/white  | 7-7/10" (196 mm) | 12 & 14 AWG solid (2.5 mm <sup>2</sup> & 1.5 mm <sup>2</sup> ) | 12/2 & 14/2     | 6-32 & 8-32    | .41           |

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



## Dual NM Cable Stripper/Cutter

- 12/2 and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Cushion grip handles provide comfort.
- Precision-ground stripping holes easily remove insulation on 12 and 14 AWG lead wires.
- Strong-gripping serrated nose; easy bending, shaping and pulling of wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.
- Holes for quick wire looping and bending.
- 6-32 and 8-32 screw-shearing holes.
- Spring-loaded for self-opening action.
- Handy closure lock for convenient storage.



1412

| Cat. No. | Handle Color | Overall Length  | Strips and Cuts  | Type NM-B Cable | Screw Shearing | Weight (lbs.) |
|----------|--------------|-----------------|--|-----------------|----------------|---------------|
| 1412     | yellow       | 7-7/8" (200 mm) | 12 & 14 AWG solid (2.5 mm <sup>2</sup> & 1.5 mm <sup>2</sup> ) | 12/2 & 14/2     | 6-32 & 8-32    | .39           |

## Type NM Cable Strippers/Cutters

- Patented stripping slot quickly removes outer jacket of Type NM-B nonmetallic-sheathed cable.
- Handle grips with cushion ridges provide comfort.
- Precision-ground stripping hole easily removes insulation on lead wires.
- Serrated nose easily bends, shapes, or pulls wire.
- Narrow nose fits into tight places.
- Shear-type steel blades for square, clean cuts on solid copper wire.
- Spring-loaded for self-opening action.
- Handy closure lock for convenient storage.
- Holes for looping and bending wire.
- Handle tip identifies size of cable.



1012

| Cat. No. | Handle Color                          | Overall Length  | Strips and Cuts                     | Type NM-B Cable | Weight (lbs.) |
|----------|---------------------------------------|-----------------|-------------------------------------|-----------------|---------------|
| 1012     | yellow/grey with marking 12/2 at tip  | 6-1/4" (159 mm) | 12 AWG solid (2.5 mm <sup>2</sup> ) | 12/2            | .26           |
| 1014     | yellow/white with marking 14/2 at tip | 6-1/4" (159 mm) | 14 AWG solid (1.5 mm <sup>2</sup> ) | 14/2            | .26           |

## NM Cable Ripper

### NM Cable Ripper

- An easy-to-use cable ripper.
- Slits the outer jacket of Romex® cable (all sizes) and other nonmetallic (type NM) sheathed cable.
- Measures conductor wire gauge from 6 to 14 AWG.



74018

| Cat. No. | Overall Length | Slits                      | Measures Wire Gauge                                    | Weight (lbs.) |
|----------|----------------|----------------------------|--|---------------|
| 74018    | 3-1/2" (89 mm) | all sizes of Romex® and NM | 6 - 14 AWG (10 mm <sup>2</sup> - 1.5 mm <sup>2</sup> ) | .08           |

Romex® is a registered trademark of General Cable Corporation.

All dimensions are in inches and (millimeters).


**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



# Wire Strippers/Cutters

## Features:

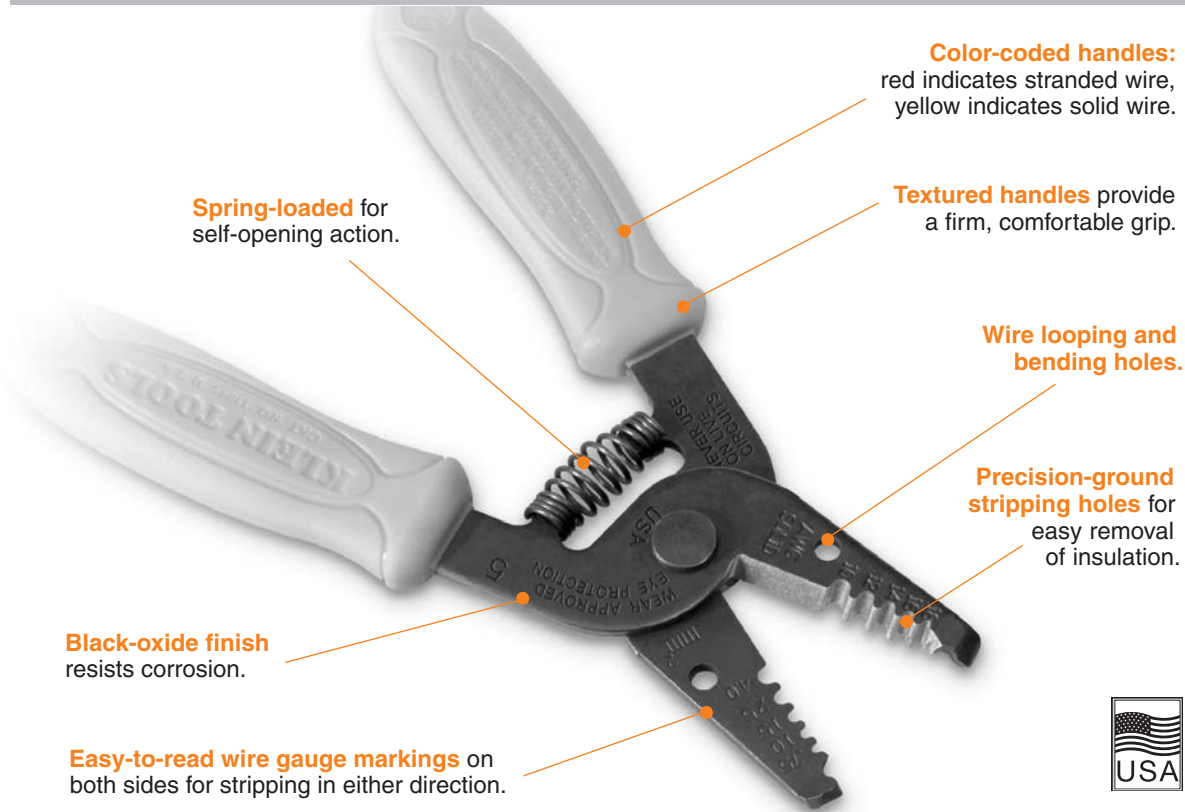

## Wire Strippers/Cutters

### Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do not use for cutting steel wire or bolts.



11045

| Cat. No. | Handle Color | Overall Length  | Strips and Cuts   | Weight (lbs.) |
|----------|--------------|-----------------|---|---------------|
| 11045    | yellow       | 6-1/4" (159 mm) | 10 – 18 AWG solid (4.0 mm <sup>2</sup> – .75 mm <sup>2</sup> )    | .27           |
| 11046    | red          | 6-1/4" (159 mm) | 16 – 26 AWG stranded (1.0 mm <sup>2</sup> – .14 mm <sup>2</sup> ) | .27           |
| 11047    | yellow       | 6-1/4" (159 mm) | 22 – 30 AWG solid (.34 mm <sup>2</sup> – .50 mm <sup>2</sup> )    | .27           |
| 11049    | red          | 6-1/4" (159 mm) | 8 – 18 AWG stranded (6 mm <sup>2</sup> – .75 mm <sup>2</sup> )    | .27           |

## Dual-Wire Stripper/Cutter

### Additional Features:

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.



11048

| Cat. No. | Handle Color | Overall Length  | Strips and Cuts   | Weight (lbs.) |
|----------|--------------|-----------------|---|---------------|
| 11048    | yellow       | 6-1/4" (159 mm) | 10, 12, 14 AWG solid (4.0 mm <sup>2</sup> , 2.5 mm <sup>2</sup> , 1.5 mm <sup>2</sup> ) | .27           |




**SOLID**

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Will NOT protect against electrical shock.



## Wire Stripper/Cutter – Solid and Stranded Wire

- Strips six standard wire sizes without nicking wire.
- Scissors action of 1 1/2" (13 mm) wide cutter makes clean cuts with little effort.
- Serrated nose jaws to bend, shape or pull wire; holes for looping wire ends.
- Spring-loaded for self-opening action.
- Comfortable, plastic-covered handles.




| Cat. No. | Overall Length  | Strips and Cuts   | Handle Color | Weight (lbs.) |
|----------|-----------------|---|--------------|---------------|
| 1011     | 6-1/8" (156 mm) | 10 – 20 AWG solid & stranded (4.0 mm <sup>2</sup> – .50 mm <sup>2</sup> ) | blue         | .23           |



1011

## Adjustable Wire Strippers/Cutters – Solid and Stranded Wire

- A handy, light, compact tool for stripping insulation.
- Convenient hole for looping or bending wire.
- Black-oxide finish with plastic-dipped handles.
- Cuts, strips, and loops 12-26 solid and stranded wire.
- Adjustable slide stop with set screw for repeat stripping work.

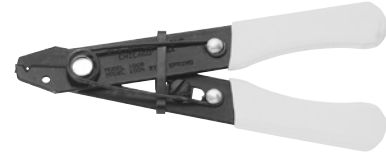

| Cat. No. | Hold-Open Spring | Overall Length | Strips and Cuts  | Handle Color | Weight (lbs.) |
|----------|------------------|----------------|--|--------------|---------------|
| 1004     | yes              | 5" (127 mm)    | 12 – 26 AWG solid & stranded (2.5 mm <sup>2</sup> – 0.14 mm <sup>2</sup> ) | yellow       | .18           |
| 1003     | no               | 5" (127 mm)    | 12 – 26 AWG solid & stranded (2.5 mm <sup>2</sup> – 0.14 mm <sup>2</sup> ) | yellow       | .14           |



1004

## Adjustable Wire Stripper – Solid and Stranded Wire

- Simply dial desired wire size for fast, easy stripping.
- Adjustable tool makes short work of cutting and stripping operations.
- Finely honed nose cutter easily gets into tight areas.
- Wire gauge dial sets stripping dies to proper size, helps prevent nicked wire.
- Black-oxide finish with plastic-dipped handles.
- Spring-loaded design – tool opens automatically after each action.



| Cat. No. | Overall Length   | Strips and Cuts   | Handle Color | Weight (lbs.) |
|----------|------------------|---|--------------|---------------|
| 74007    | 5-1/20" (128 mm) | adjusts from 12 – 24 AWG (2.5 mm <sup>2</sup> – .25 mm <sup>2</sup> ) | yellow       | .15           |



74007

## Automatic Wire Stripper – Solid and Stranded Wire

- Strips from No. 10 to 22 AWG, up to a full 1" (24 mm).
- No nicking, cutting or fraying wire.
- Blades also available for 8 to 12 AWG and 16 to 26 AWG.
- Wire is automatically gripped and stripped with the same motion. Release pressure and jaws automatically open to release stripped wire. For clear nylon-jacket conductors, two activations are required.
- Plastic hand grips for comfort.
- Supplied with adjustable wire stop as standard feature, to assure uniform, precise strip length.



| Cat. No. | Overall Length  | Strips and Cuts  | Handle Color | Weight (lbs.) |
|----------|-----------------|--|--------------|---------------|
| 11062    | 6-1/2" (165 mm) | 10 – 22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | blue         | .76           |



11062

### Replacement Blades (Pair)

|       |  |     |
|-------|--|-----|
| 11070 | 8 – 12 AWG (6.0 mm <sup>2</sup> – 2.5 mm <sup>2</sup> )  | .01 |
| 11072 | 10 – 22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | .01 |
| 11075 | 16 – 26 AWG (1.0 mm <sup>2</sup> – .14 mm <sup>2</sup> ) | .01 |


### Replacement Adjustment Wire Stop

11080

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.


**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



# Wire Strippers/Cutters

## Self-Adjusting Wire Stripper – Solid and Stranded Wire

- Automatically adjusts to the diameter of the wire.
- Cutting blades never touch the conductors, preventing damage to the wire.
- Spring action returns stripper to ready-to-use position.
- Latch holds handles together when not in use.
- Comfortable plastic handles with thumb guard.

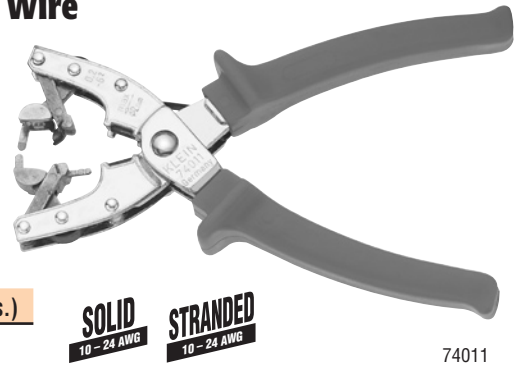

| Cat. No. | Overall Length | Strips and Cuts   | Handle Color | Weight (lbs.) |
|----------|----------------|---|--------------|---------------|
| 74011    | 7" (178 mm)    | 10–24 AWG stranded & solid (4.0 mm <sup>2</sup> – .25 mm <sup>2</sup> ) | red          | .45           |

**SOLID**  
10–24 AWG

**STRANDED**  
10–24 AWG

74011

## Combination Wire-Stripping and Cutting Tools

### Multi-Purpose 6-in-1 Tool

- Cleanly shears bolts.
- Easily cuts and strips wire.
- Measures stud sizes.
- Gauges wire sizes.
- Crimps insulated terminals.
- Plastic-covered cushioned handles for comfort.



1000

| Cat. No. | Overall Length  | Strips and Cuts  | Bolt Sizes                     | Handle Color | Weight (lbs.) |
|----------|-----------------|--|--------------------------------|--------------|---------------|
| 1000     | 7-3/4" (197 mm) | 10–22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | 4-40, 6-32, 8-32, 10-24, 10-32 | red          | .44           |

### Multi-Purpose Electrician's Tool – 8-22 AWG

- Two wire cutters—one at tip, the other halfway back near stripping holes—double the utility of this tool.
- Crimps 7-8 mm insulated and non-insulated terminals, lugs and splices.
- Cuts and strips 8-22 AWG solid and 10-26 AWG stranded wire.
- Cleanly shears bolts.
- Pivot nut adjusts tension.
- Left- and right-hand wire-looping holes near tip.
- Full-sized, plastic-covered cushioned handles for comfort.
- Wire cutter in nose and below pivot.
- Crimping dies color-coded for easy identification.




1001

| Cat. No. | Overall Length  | Strips and Cuts  | Bolt Sizes                     | Handle Color | Weight (lbs.) |
|----------|-----------------|--|--------------------------------|--------------|---------------|
| 1001     | 8-1/2" (216 mm) | 10–26 AWG stranded (4.0 mm <sup>2</sup> – .14 mm <sup>2</sup> )<br>8–22 AWG solid (6.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | 4-40, 6-32, 8-32, 10-24, 10-32 | red          | .47           |

### Multi-Purpose Tool – 10-22 AWG

- Crimps insulated and non-insulated terminals, lugs and splices.
- Crimps 7 mm ignition and distributor terminals.
- Easily cuts and strips wire.
- Cleanly shears bolts.
- Wire cutter in nose.
- Plastic-covered cushioned handles for comfort.



1002

| Cat. No. | Overall Length  | Strips and Cuts  | Bolt Sizes                     | Handle Color | Weight (lbs.) |
|----------|-----------------|--|--------------------------------|--------------|---------------|
| 1002     | 8-1/2" (216 mm) | 10–22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | 4-40, 6-32, 8-32, 10-24, 10-32 | red          | .46           |

All dimensions are in inches and (millimeters).

**⚠WARNING:** Always wear approved eye protection.


**⚠WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



# Combination Wire-Stripping and Cutting Tools

## Coax Multi-Purpose Tool

- Hardened, precision steel cutting blades cleanly and easily cut aluminum or copper RG-6 and RG-59 coaxial cable.
- Diamond-shaped, precision-ground stripping holes easily remove outer jacket of cable.
- Precision-ground stripping hole quickly removes inner dielectric insulation without nicking the center conductor.
- Three precision-crimping dies for standard F-type and ring connectors.
- Air pocket, cushion-grip handles provide a better grip and comfort.
- Black-oxide finish for durability and rust protection.

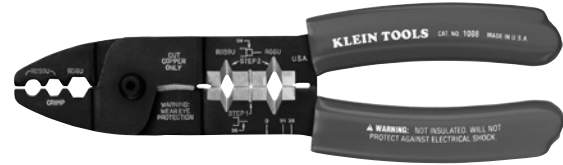

1008

| Cat. No. | Overall Length  | Coax Cable   | Handle Color | Weight (lbs.) |
|----------|-----------------|--------------|--------------|---------------|
| 1008     | 8-1/2" (216 mm) | RG-59 & RG-6 | blue         | .50           |

## Long-Nose Multi-Purpose Tool

- Easily cuts and strips wire.
- Narrow, serrated pliers nose to pull, loop, and bend wire.
- Long, curved cutting blade.
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places.
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals.
- Cleanly shears bolts.
- Plastic-covered cushioned handles for comfort.



1010

| Cat. No. | Overall Length  | Bolt Sizes                           | Strips and Cuts  | Connectors    | Handle Color | Weight (lbs.) |
|----------|-----------------|--------------------------------------|--|---------------|--------------|---------------|
| 1010     | 8-1/4" (210 mm) | 4-40, 5-40, 6-32, 8-32, 10-32, 10-24 | 10 – 22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> ) | 10 – 22 gauge | blue         | .43           |

## Trip-Saver®

- Unique multi-tool addresses the special needs of electricians and maintenance professionals while providing many other features handy on any job.
- Compact, lightweight, and very sturdy.
- Produced from high-carbon, rust-resistant stainless steel.
- Specially designed locking "L" handle snaps securely into the "L" channel, locking the fully opened blade or implement in place during use.
- Features the following:  
Needle-Nose Pliers, Beveled Wire Cutter, Toothed Pipe Grippers, Files (coarse and fine), 5-Slot Wire Stripper (10-18) AWG, Wire-Looping Hole, Scraper, Awl/Reamer, Serrated Sheepsfoot Knife, Clip-Point Knife, Standard/Metric Ruler, Drywall Saw, Locking "L" Handle, #1 and #2 Phillips Hex Bits, Small-Slotted Hex Bit, Large-Slotted Hex Bit, 1/4" Socket Adapter, Lanyard Hole, Nylon Pouch.



1016

| Cat. No.   | Overall Length  | Weight (lbs.) |
|--|-----------------|---------------|
| 1016   | 5-3/4" (143 mm) | .95           |
| <b>Replacement pouch with bit holder (no bits)</b> |                 |               |
| 1016RP   |                 | .45           |

**▲WARNING:** Never use on or near live electrical circuits.


**▲WARNING:** Close handles to lock blade in place before use.

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

Strippers, Cutters & Crimpers



# Crimping Tools

## Crimping/Cutting Tools – Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



1005

| Cat. No.   | Handle Color | Crimps      | Overall Length  | Weight (lbs.) |
|--|--------------|-------------|-----------------|---------------|
| 1005   | red          | 10 – 22 AWG | 9-3/4" (248 mm) | .80           |
| <b>Journeyman Series – Dual-material handles</b> |              |             |                 |               |
| J1005  | red/black    | 10 – 22 AWG | 9-3/4" (248 mm) | .84           |

## Crimping/Cutting Tool – Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Plastic-dipped cushioned handles for comfort.



1006

| Cat. No. | Handle Color | Crimps      | Overall Length  | Weight (lbs.) |
|----------|--------------|-------------|-----------------|---------------|
| 1006     | black        | 10 – 22 AWG | 9-3/4" (248 mm) | .85           |

## Large Crimp Tool - Compound-Action

- Crimps 6-4/0 AWG lugs and terminals.
- All-in-one, integral crimp nest. No removable parts or rotating dies.
- High-leverage handles and compound-action mechanism for superior mechanical advantage.
- Ultra-comfortable hand grips for easy use.
- Adjustment screw allows user to control crimp depth.



| Cat. No.         | Crimps                         | Handle Color | Overall Length   | Weight (lbs.) |
|------------------|--------------------------------|--------------|------------------|---------------|
| <b>NEW!</b> 2006 | 6 – 4/0 AWG lugs and terminals | black        | 19-1/2" (495 mm) | 3.80          |


2006

**▲WARNING:** Never use on or near live electrical circuits.

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.





## Full-Cycle Ratcheting Crimper – Insulated Terminals

- Crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Color-coded wire size markings.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.



T1715

| Cat. No. | Handle Color | Crimps      | Overall Length | Weight (lbs.) |
|----------|--------------|-------------|----------------|---------------|
| T1715    | black        | 10 – 22 AWG | 9" (229 mm)    | 1.05          |

## Compound-Action Ratcheting Crimper – Insulated Terminals

- Compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Special locator quickly positions terminal for double crimp.
- Comfort-grip plastic handles.



T1710

| Cat. No. | Handle Color | Crimps      | Overall Length | Weight (lbs.) |
|----------|--------------|-------------|----------------|---------------|
| T1710    | black        | 10 – 22 AWG | 9" (229 mm)    | 1.29          |

## Full-Cycle Coax Ratcheting Crimper

- Crimps hex-configuration (in dimensions across flats) coaxial connectors.
- Dimensions clearly marked for quick identification.
- Front cavity (.262") for RG-59.
- Middle cavity (.324") for RG-5, 6, 21, 143, 212, 222, and 304, also for Belden 8281, 9231 and 9141.
- Rear cavity (.382") for RG-8, 9, 11, 149, and 213.
- Ratchet release allows quick removal of incorrectly placed connector prior to completing crimp.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.
- Tool jaws will not open until the crimp is completed. They release and open automatically when crimp is done.



T1720

| Cat. No. | Handle Color | Hex Configurations   | Overall Length | Weight (lbs.) |
|----------|--------------|--|----------------|---------------|
| T1720    | black        | front cavity .262"<br>middle cavity .324"<br>rear cavity .382" | 9" (229 mm)    | 1.30          |

All dimensions are in inches and (millimeters).

**▲WARNING:** Always wear approved eye protection.

**▲WARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



