


ROUND BASE SWIVEL & PIVOT HOIST RING

(HIGH STRENGTH ALLOY SCREWS MUST BE USED)
(BOTH UNC AND COIL AVAILABLE)

- SWIVELS 360° - PIVOTS 180°
- MATERIAL: AIRCRAFT QUALITY ALLOY
- FINISH: BLACK OXIDE PER MIL SPEC.
(CADMIUM PLATED AVAILABLE)
- SAFETY FACTOR: 5:1
- MAGNETIC PARTICLE INSPECTED
- CERTIFIED HEAT TREATMENT

READ SAFETY PRECAUTION
PRIOR TO USE
(PAGE 57)

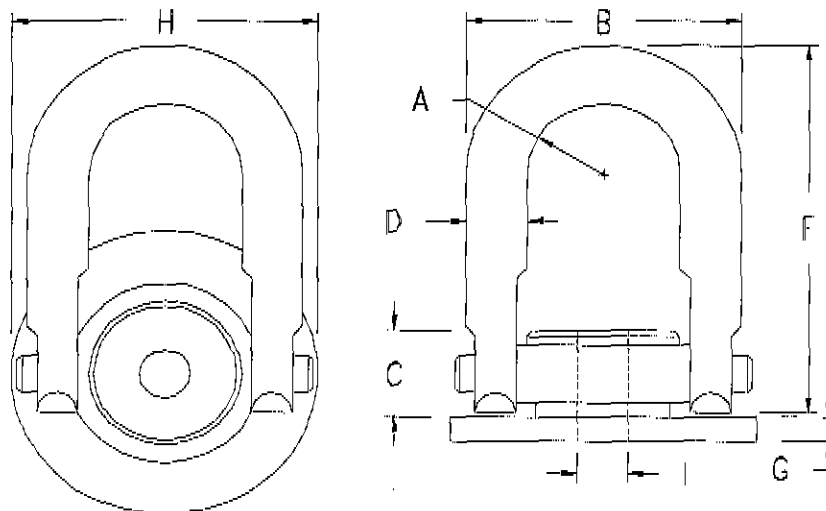

Part No.	Rated Load (lbs)	A	B	C	D	H	F	G	I	Torque Ft/Lbs	Wt. (Lbs)
44646	2,500	0.88	3-1/4	1-7/64	3/4	3-1/2	6-3/4	1/4	1/2	28	3.5
44642	4,000	0.88	3-1/4	1-7/64	3/4	3-1/2	6-3/4	1/4	5/8	60	3.5
44654	5,000	0.88	3-1/4	1-7/64	3/4	3-1/2	6-3/4	1/4	3/4	100	3.5
44660	7,000	1.40	4-13/16	1-1/2	1	5	8-7/64	13/32	3/4	100	9.0
44656	8,000	1.40	4-13/16	1-1/2	1	5	8-7/64	13/32	7/8	160	9.0
44666	10,000	1.40	4-13/16	1-1/2	1	5	8-7/64	13/32	1	230	9.0
44802	15,000	1.75	6	1-7/8	1-1/4	7	8-3/4	1/2	1-1/4	470	17.0
44803	15,000	1.75	6	1-7/8	1-1/4	7	8-3/4	1/2	1-1/2	800	17.0
44704	20,000	2.00	7-11/32	2	1-1/2	7	10-3/16	1/2	1-1/2	800	24.0
44404	24,000	2.25	8	2-3/8	1-3/4	7	12-1/2	1/2	1-1/2	800	40.0
44406	24,000	2.25	8	2-3/8	1-3/4	7	12-1/2	1/2	1-3/4	800	40.0
44408	30,000	2.25	8	2-3/8	1-3/4	7	12-1/2	1/2	2	800	40.0

(TO ORDER SPECIAL PLATE FOR WELD-ON APPLICATIONS, ADD "-W" TO PART NUMBER)