


Single Sheave Tailboard Block



W.L.L (METRIC TON)				A	B	E	F	L	P	Q	S
MODEL NO.	STANDARD WIRE ROPE SIZE	MAX. ALLOW OPTIONAL	WT	Overall Length	Net Length	Thick-ness	Width	Center Pin Dia.	Pin Dia.	Width Betwn. Plate	Bottom Plate Radius
2 MT											
SB 2S 3BT	5/16 – 3/8	3/8	3	5.33	4.41	2.91	3.20	0.75	0.50	1.06	0.92
4 MT											
SB 4S 4BT	3/8 – 1/2	3/4	9	7.82	6.51	3.79	4.76	1.00	0.75	1.58	1.31
SB 4S 4RT	3/8 – 1/2	3/4	9	7.82	6.51	3.79	4.76	1.00	0.75	1.58	1.31
SB 4S 6BT	3/8 – 1/2	3/4	14	10.00	8.69	3.79	6.26	1.00	0.75	1.58	1.31
SB 4S 6RT	3/8 – 1/2	3/4	14	10.00	8.69	3.79	6.26	1.00	0.75	1.58	1.31
SB 4S 8BT	3/8 – 1/2	3/4	19	12.00	10.69	3.79	8.26	1.00	0.75	1.58	1.31
SB 4S 8RT	3/8 – 1/2	3/4	19	12.00	10.69	3.79	8.26	1.00	0.75	1.58	1.31
SB 4S 10BT	3/8 – 1/2	3/4	27	14.06	12.75	3.79	10.26	1.25	0.75	1.58	1.31
SB 4S 10RT	3/8 – 1/2	3/4	25	14.06	12.75	3.79	10.26	1.25	0.75	1.58	1.31
SB 4S 12BT	3/8 – 1/2	7/8	34	16.06	14.75	3.79	12.26	1.25	0.75	1.58	1.31
SB 4S 12RT	3/8 – 1/2	7/8	36	16.06	14.75	3.79	12.26	1.25	0.75	1.58	1.31
SB 4S 14BT	3/8 – 1/2	3/4	43	18.06	16.75	3.79	14.26	1.25	0.75	1.58	1.31
SB 4S 14RT	3/8 – 1/2	3/4	45	18.06	16.75	3.79	14.26	1.25	0.75	1.58	1.31
8 MT											
SB 8S 6BT	5/8 – 3/4	1	17	10.61	8.80	4.28	6.24	1.50	1.00	1.65	1.81
SB 8S 6RT	5/8 – 3/4	1	20	10.61	8.80	4.28	6.24	1.50	1.00	1.65	1.81
SB 8S 8BT	5/8 – 3/4	7/8	25	12.61	10.80	4.28	8.24	1.50	1.00	1.65	1.81
SB 8S 8RT	5/8 – 3/4	7/8	14	12.61	10.80	4.28	8.24	1.50	1.00	1.65	1.81
SB 8S 10BT	5/8 – 3/4	3/4	31	14.61	12.80	4.28	10.24	1.50	1.00	1.65	1.81
SB 8S 10RT	5/8 – 3/4	3/4	30	14.61	12.80	4.28	10.24	1.50	1.00	1.65	1.81
SB 8S 12BT	5/8 – 3/4	7/8	34	16.64	14.83	4.28	12.18	1.50	1.00	1.65	1.81
SB 8S 12RT	5/8 – 3/4	7/8	45	16.64	14.83	4.28	12.18	1.50	1.00	1.65	1.81
SB 8S 14BT	5/8 – 3/4	7/8	54	18.64	16.83	4.28	14.18	1.50	1.00	1.65	1.81
SB 8S 14RT	5/8 – 3/4	7/8	54	18.64	16.83	4.28	14.18	1.50	1.00	1.65	1.81
12 MT											
SB 12S 6BT	3/4 – 7/8	1 1/8	29	12.21	9.77	5.23	6.68	2.00	1.25	2.03	2.44
SB 12S 6RT	3/4 – 7/8	1 1/8	30	12.21	9.77	5.23	6.68	2.00	1.25	2.03	2.44
SB 12S 8BT	3/4 – 7/8	1 1/8	39	13.77	11.33	5.23	8.24	2.00	1.25	2.03	2.44
SB 12S 8RT	3/4 – 7/8	1 1/8	39	13.77	11.33	5.23	8.24	2.00	1.25	2.03	2.44
SB 12S 10BT	3/4 – 7/8	1 1/8	52	15.77	13.33	5.23	10.24	2.00	1.25	2.03	2.44
SB 12S 10RT	3/4 – 7/8	1 1/8	54	15.77	13.33	5.23	10.24	2.00	1.25	2.03	2.44
SB 12S 12BT	3/4 – 7/8	1 1/8	72	17.77	15.33	5.23	12.24	2.00	1.25	2.03	2.44
SB 12S 12RT	3/4 – 7/8	1 1/8	69	17.77	15.33	5.23	12.24	2.00	1.25	2.03	2.44
SB 12S 14BT	3/4 – 7/8	1 1/8	85	19.77	17.33	5.23	14.24	2.00	1.25	2.03	2.44
SB 12S 14RT	3/4 – 7/8	1 1/8	84	19.77	17.33	5.23	14.24	2.00	1.25	2.03	2.44
SB 12S 16BT	3/4 – 7/8	7/8	108	21.93	19.49	5.23	16.36	2.00	1.25	2.03	2.44
SB 12S 16RT	3/4 – 7/8	7/8	113	21.93	19.49	5.23	16.36	2.00	1.25	2.03	2.44
15 MT											
SB 15S 8BT	3/4 – 7/8	1 1/8	39	13.77	11.33	5.23	8.24	2.50	1.25	2.03	2.44
SB 15S 8RT	3/4 – 7/8	1 1/8	39	13.77	11.33	5.23	8.24	2.00	1.25	2.03	2.44
SB 15S 10BT	3/4 – 7/8	1 1/8	52	15.77	13.33	5.23	10.24	2.50	1.25	2.03	2.44
SB 15S 10RT	3/4 – 7/8	1 1/8	63	15.77	13.33	5.23	10.24	2.00	1.25	2.03	2.44

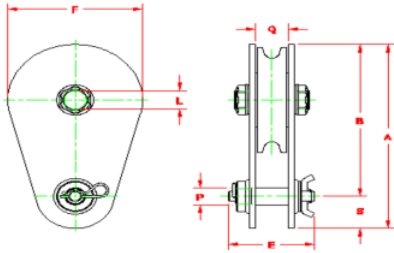