


SYNTHETIC SLING CONNECTOR WITH PIN/LOCK WASHER - SKR/SKA

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	L	Dimensions (Inches)			Weight Each (Lbs.)
						B	K	S	
545591	SKR/SKA-7/8-8	9/32"	80	3,500	1.4	1.6	0.71	0.94	0.44
545591	SKR/SKA-7/8-8	5/16"	80	4,500	1.4	1.6	0.71	0.94	0.44
545592	SKR/SKA-10-8	3/8"	80	7,100	1.7	1.9	0.94	1.1	0.88
545593	SKR/SKA-13-8	1/2"	80	12,000	2.0	2.1	1.1	1.4	1.5
545594	SKR/SKA-16-8	5/8"	80	18,100	2.4	2.6	1.4	1.7	2.6
545595	SKR/SKA-18/20-8	3/4"	80	28,300	2.8	3.1	1.7	2.0	4.2
545596	SKR/SKA-22-8	7/8"	80	34,200	4.4	4.9	2.0	2.8	11.7
545597	SKR/SKA-26-8	1"	80	47,700	5.1	5.9	2.3	3.4	19.8

* Design Factor 4:1 Proof tested and certified.
For components see table on page 14

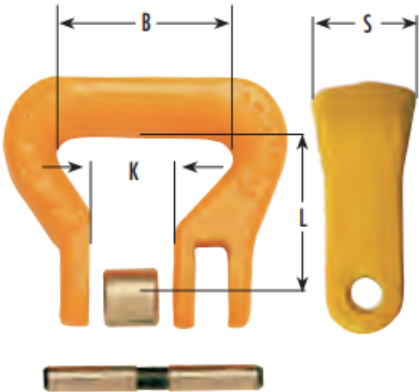

WARNING

SEE WARNINGS AND USE LIMITATIONS ON PAGES 26-36